

Digital Clocks

72 MHz



Sleek, low-profile design puts the focus on the bright LED digits to keep your facility running on time. Our Levo Series clocks are designed to be easily seen from up to 150 feet away. They synchronize seamlessly with your Primex 72 MHz system using our proprietary 72 MHz signal that transmits easily through common building materials and across longer distances with less potential for signal interference.

Automatically Adjust for Daylight Saving Time

Think of the time you and your team will save when you no longer need to manually adjust each and every clock in your facility after Daylight Saving Time shifts. Our Levo Series Digital Clocks feature highly visible, seven-segment LED digits in a sleek black casing to integrate well into virtually any indoor environment. The onboard control panel allows you to select a variety of options, including alternating date/time and 12- or 24-hour time display.

72 MHZ SURFACE MOUNT DIGITAL CLOCKS

4-DIGIT	6-DIGIT	DESCRIPTION
103-AS215R	103-AS235R	Digital Clock, Levo 2.5", Single-sided, Red LED, 120 Volt, 10' cord with plug connector
103-AS215G	103-AS235G	Digital Clock, Levo 2.5", Single-sided, Green LED, 120 Volt, 10' cord with plug connector
NA	103-ASP35R	Digital Clock, Levo 2.5", Red LED, 120 Volt, 30" cord with pigtail
NA	103-ASP35G	Digital Clock, Levo 2.5", Green LED, 120 Volt, 30" cord with pigtail
103-AS225R	103-AS250R	Digital Clock, Levo 4", Single-sided, Red LED, 120 volt, 10' cord with plug connector
103-AS225G	103-AS250G	Digital Clock, Levo 4", Single-sided, Green LED, 120 volt, 10' cord with plug connector

72 MHZ DIGITAL CLOCK, REMOTE ANTENNA

4-DIGIT	6-DIGIT	DESCRIPTION
107-AS215R	107-AS235R	Digital Clock, Levo 2.5", Single-sided, Red LED, 120 Volt, 10" cord with plug connector, Remote Antenna
NA	107-AS235G	Digital Clock, Levo 2.5", Single-sided, Green LED, 120 Volt, 10' cord with plug connector, Remote Antenna
NA	107-ASP35R	Digital Clock, Levo 2.5", Red LED, 120 Volt, Remote Antenna, 30" cord with pigtail
107-AS225R	107-AS250R	Digital Clock, Levo 4", Single-sided, Red LED, 120 Volt, 10' cord, Remote Antenna

FLUSH MOUNT KIT

PART NO.	DESCRIPTION
199-000106	Flush Mount Kit, for 2.5" 6-digit clocks only

ACCESSORIES

PART NO.	DESCRIPTION
100-000378	Sync Digital Clock Accessory, 30" Power Cord, 120 VAC
100-000380	Sync Clock Accessory, 120V 30" Pigtail Power Cord
199-000032	18 Degree Bracket for 2.5" Digital Clock

Dual Clock Kit

Any two surface-mount digital clocks can be mounted back-to-back to provide greater visibility in hallways and larger areas. Select the correct Dual Clock Bracket Kit for your application below.

DUAL CLOCK BRACKET KIT

MOUNT	2.5", 4-DIGIT	2.5", 6-DIGIT	4", 4-DIGIT	4", 6-DIGIT*
Ceiling	198-000005	198-000007	198-000009	198-000009
Wall	198-000006	198-000008	198-000009	NA

* 4" 6-digit clock can be ceiling mount only.



4-Digit Red



6-Digit Green



Surface Mount



Flush-Mount



Dual Mount - Ceiling



Dual Mount - Wall



FEATURES

- Available in 120 VAC or 24 VAC input
- Highly visible, seven-segment LED digits
- Three display dimmer options: 75%, 50%, and 25%
- Power outage memory backup for up to one hour
- Automatically adjusts for Daylight Saving Time

SINGLE CLOCK DIMENSIONS

CLOCK TYPE	WEIGHT	HEIGHT A	WIDTH B	DEPTH C
2.5" (6.4cm), 4-digit	1.8 lbs. (0.8 kg)	5.0" (12.7cm)	10.8" (27.4cm)	2.8" (5.6cm)
4" (10.16cm), 4-digit	3.9 lbs. (1.8 kg)	8.0" (20.3cm)	17.9" (45.5cm)	2.4" (6.1cm)
2.5" (6.4cm), 6-digit	2.0 lbs. (0.9 kg)	5.0" (12.7cm)	13.8" (34.9cm)	2.2" (5.6cm)
4" (10.16cm), 6-digit	4.6 lbs. (2.1 kg)	8.0" (20.3cm)	23.3" (59.2cm)	2.4" (6.1cm)

DUAL-MOUNT DIMENSIONS





CLOCK TYPE	WIDTH FROM WALL A	HEIGHT FROM CEILING B	DEPTH OF TWO CLOCKS C
Dual 2.5" (6.4cm), 4-digit	13.8" (35.1cm)	8.0" (20.3cm)	5.9" (15.0cm)
Dual 4" (10.16cm), 4-digit	20.9" (53.1cm)	11.0" (27.9cm)	6.3" (16.0cm)
Dual 2.5" (6.4cm), 6-digit	16.8" (42.7cm)	8.0" (20.3cm)	5.9" (15.0cm)
Dual 4" (10.16cm), 6-digit	NA*	11.0" (27.9cm)	6.3" (16.0cm)

* 4", 6-digit clocks cannot be dual-mounted to the wall.
Note: Dual mount clocks shipped disassembled to simplify installation.

FLUSH-MOUNT DIMENSIONS

CLOCK TYPE	WEIGHT	WIDTH A	HEIGHT B	DEPTH C
2.5" (6.4cm), 6-digit	2.0 lbs. (0.9 kg)	16.8" (42.7cm)	6.5" (16.5cm)	3.4" (8.6cm)

When ordering for new construction projects, the junction boxes for flush-mount installation may be ordered to ship in advance of clocks. Please request special shipping and provide dates when ordering.

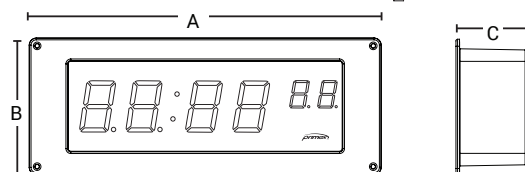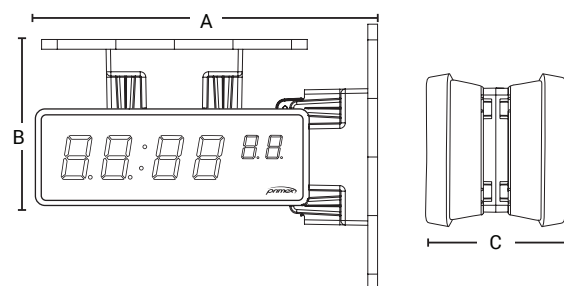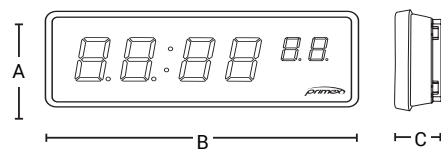

72 MHZ DIGITAL CLOCK SPECIFICATIONS

- Seven-segment LED digits
- 12- or 24-hour time display
- PM indicator light
- Alternating time and date display option
- LED dimmer option (75%, 50%, 25%)
- **Operating temperature range:** 32°-95°F (0°-35°C)
- **Storage temperature range:** -20°-185°F (-29°-85°C)
- 120 VAC (100-240)/ 50-60 cycle, 10' (3.0m) cord with plug, UL/cUL listed
- 24 VAC (18-28), 10" (25cm) cord with pigtail

To Learn More:

Call - 855-602-2934

Email - info@primexinc.com

primexinc.com



©2022 by Primex, Inc.

The Primex logo is a registered trademark of Primex, Inc. All Rights Reserved. 2.24